


# ***THERMONIZER***

The power of an ideal permeance coefficient


Change the electric potential of water to dissolve and prevent scale and rust

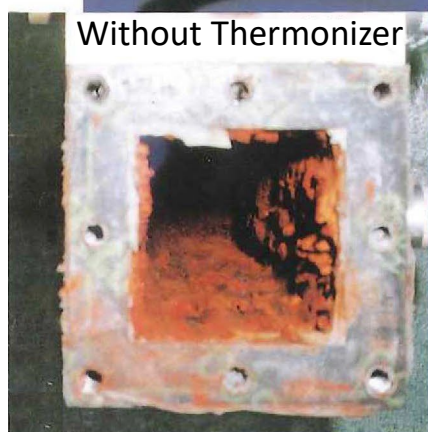

Easy installation just by winding it  
around the existing piping



Melt already  
attached scale etc.  
Less than half the price  
compared to competitors  
The maintenance fee is 0, and it  
can be used semi-permanently.  
No chemicals are used, so it's  
eco-friendly

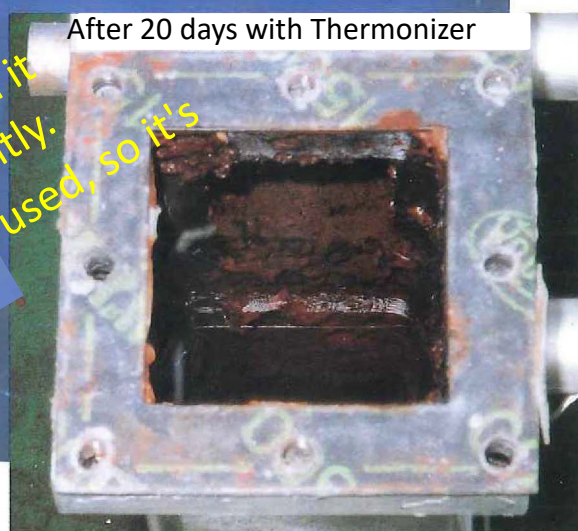

# 1 piece mounting


## Scope of application

Temperature controller, cooling tower, heat exchanger, mold, ice machine, laundry, dishwasher, car wash, distiller, water heater, hot spring, swimming pool, boiler, etc.


## How to use

### Secure it to the pipe with the attached cable tie (insulok).


When using the bracket mounting type

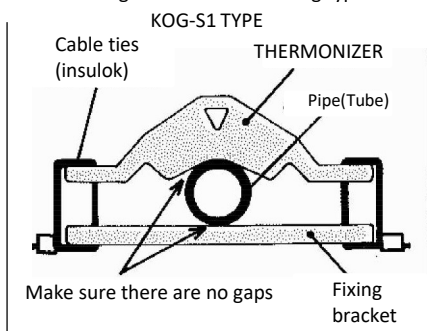

When both sides are magnet type

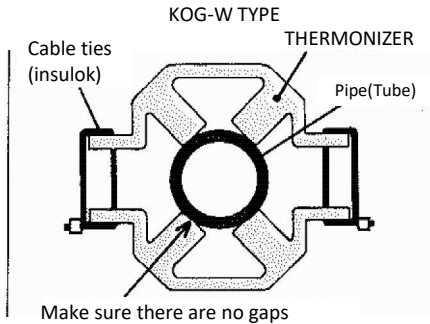

Triple type  
KOG-W3 TYPE

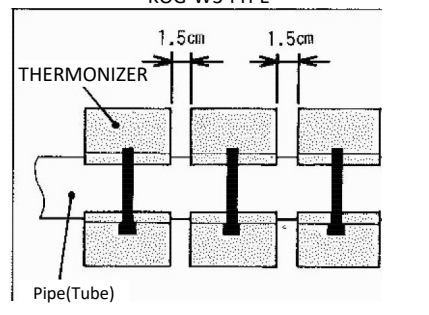

1. If there is a heat-insulating cover, remove it and attach it directly to the pipe. In addition, please cover the heat insulation from the top of the thermonizer for heat insulation.
2. It may not be effective even if it is used for chemical-treated water.
3. The effective piping length of the thermonizer is about 100m. If the total length of the pipe is long, install one every 100 m.
4. The effective flow velocity is 1m / s to 3m / s.

## list of types

When space is available, it is more effective to use the larger format.

Adaptive piping size	Thermonizer model	Remarks	ODmm	Standard price
6A ~ 15A	KCG-0615S1	One side magnet + bracket	W20X H23X L86	¥ 30,000
15A ~ 25A	KCG-1525S1	One side magnet + bracket	W66XH40X L 125	¥ 42,000
25A ~ 40A	KCG-2540W1	Magnets on both sides Single	W66X H43 XL 150	¥ 75,000
40A ~ 65A	KCG-4065W3	Magnets on both sides Triple	W66X H43X L 174	¥ 300,000
65A ~ 90A	KCG-6590W3	Magnets on both sides Triple	W66X H 7 3X L220	¥ 390,000
90A ~ 125A	KCG-90125W3	Magnets on both sides Triple	W66X H80X L250	¥ 480,000

Model description

KCG

- 0615

S

1

Thermonizer

Piping size

S: Magnet + bracket

W: Magnets on both sides

1: One-piece mounting

3: Three pieces installed

Effect of pipe material

Plastic

Stainless steel


For copper

The effect is immediate

For iron

1-3 months to oxidize

Subsequent effects are the same as other materials



## Notice

1. Keep away from electronic devices (Computers, floppy disks, clocks, proximity switches, etc) that are susceptible to magnetic fields.
2. Keep at least 1m away from sensitive equipment (Cardiac pacemaker, cathode ray tube, etc).
3. Since the thermonizer is a magnet, it loses its effect when it is directly exposed to the heat of 200 ° C or higher. Be careful.



KAWATA U.S.A.,INC.

www.kawata-usa.com